

BorealScat

A TOWER EXPERIMENT FOR UNDERSTANDING TEMPORAL CHANGES IN P-, L- AND C-BAND BACKSCATTERING FROM A BOREAL FOREST

Lars M. H. Ulander⁽¹⁾, Maciej J. Soja⁽¹⁾, Albert R. Monteith⁽¹⁾, Leif E. B. Eriksson⁽¹⁾, Erik M. Blomberg⁽¹⁾, Henrik J. Persson⁽²⁾, and Johan E. S. Fransson⁽²⁾

⁽¹⁾ Chalmers University of Technology, Gothenburg, Sweden

⁽²⁾ Swedish University of Agricultural Sciences, Umeå, Sweden

INTRODUCTION

BorealScat is a tower-based radar campaign situated in a hemi-boreal forest site in Remningstorp, Sweden. In this experiment, long-term time series radar data at P-band (435 MHz), L-band (1,27 GHz) and C-band (5,4 GHz) will be collected. The aim is to monitor the polarimetric, tomographic and Doppler radar signatures as they vary over time scales ranging from seconds to years in varying environmental conditions. This experiment will provide fundamental information about the electromagnetic scattering mechanisms in boreal forests, which will be beneficial for upcoming space-borne synthetic aperture radar (SAR) missions such as BIOMASS, SAOCOM-CS and Sentinel companion satellites.

OBJECTIVES

- Investigate how forest electromagnetic scattering mechanisms change over time
- Gain a better understanding of the effects of moisture on radar measurements
- Develop models for the mitigation of these effects in SAR imaging of boreal forests

INSTRUMENTATION



- 20-port vector network analyzer
- 20 wideband log-periodic antennas (P/L-band)
- 10 dual-pol panel antennas (C-band)
- Microwave switch matrix for calibration
- Meteorological instruments
- Soil moisture sensors
- Tree stem moisture sensors
- Web cameras

TOMOGRAPHIC ANTENNA ARRAY

The 50-m high tower will be equipped with an array of 30 antennas with different orientations. This will allow reconstructions of vertical backscattering profiles of the forest (see figure below) for all polarimetric combinations. These backscattering profiles will be used to investigate height-dependent changes in the forest. The array allows unambiguous imaging at P-, L- and C-band while minimizing mutual coupling between the antennas and limiting the backscatter contribution of the tower.

Backscattering profile at L-band
(1270 MHz)

Backscattering profile at P-band
(435 MHz)

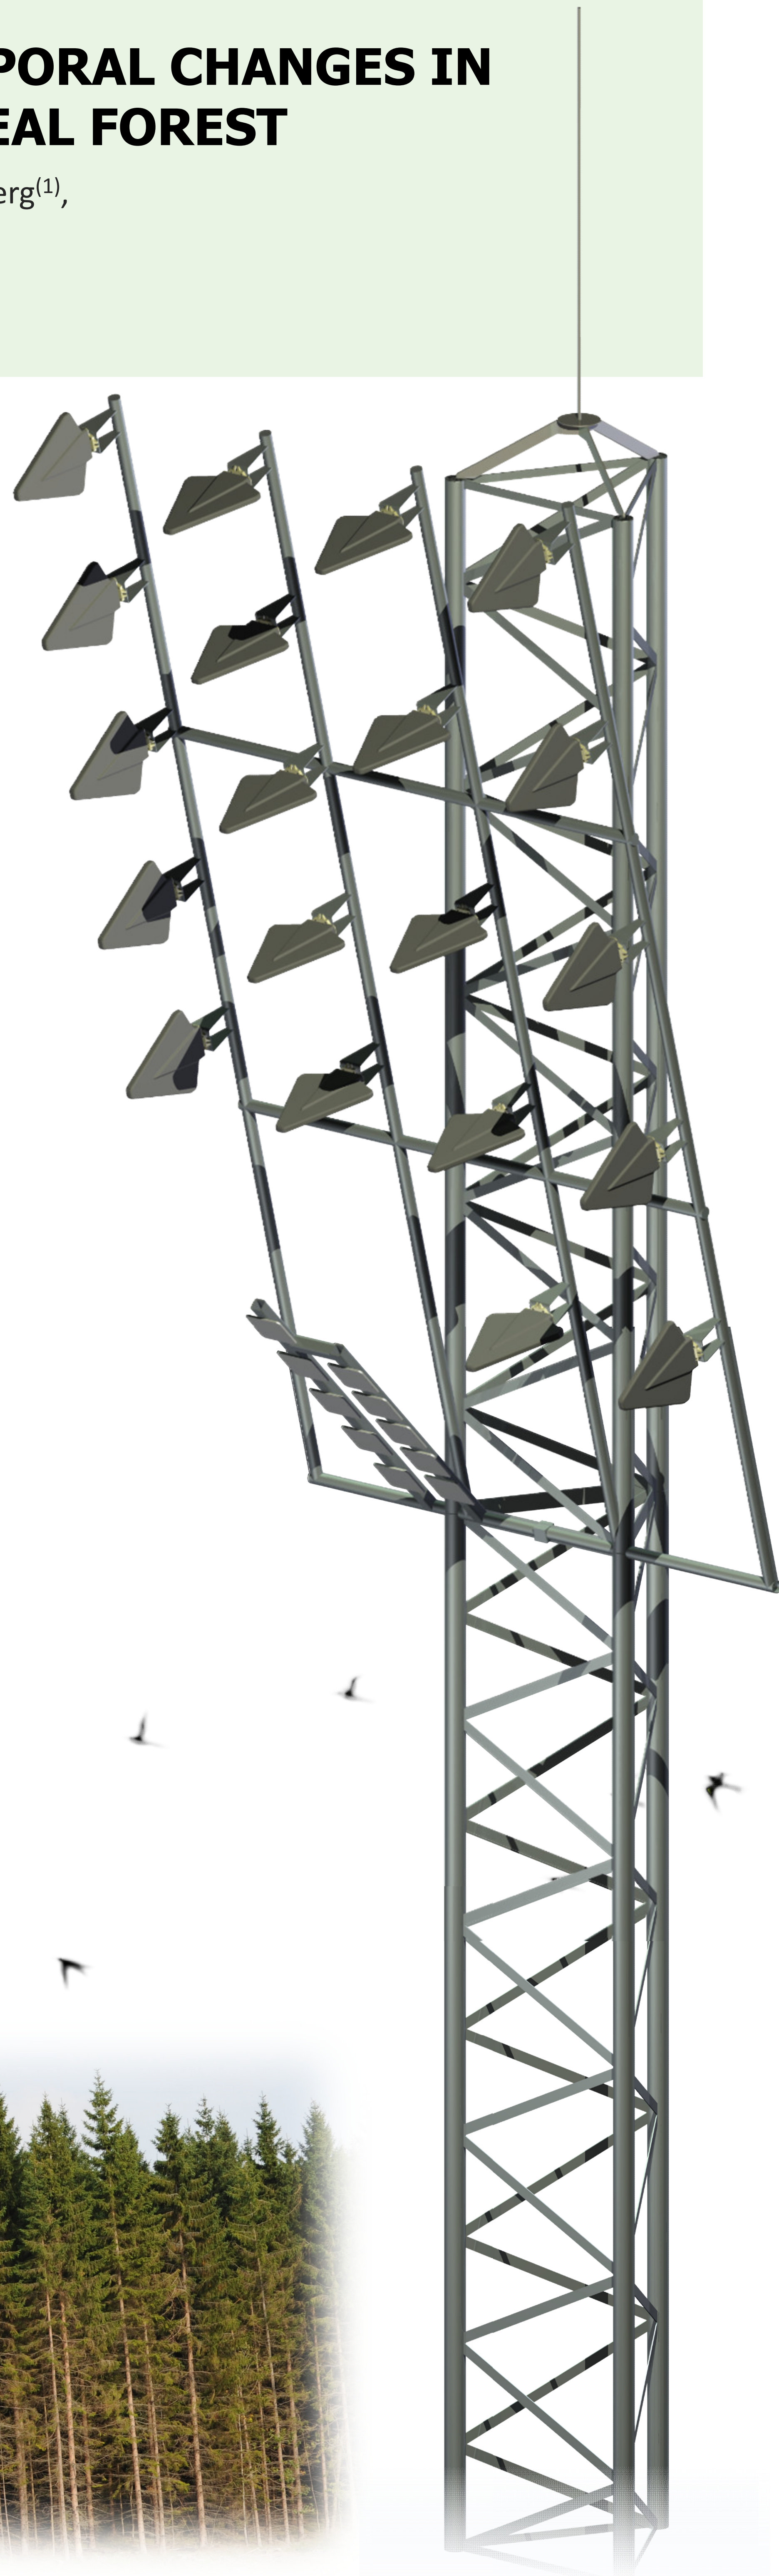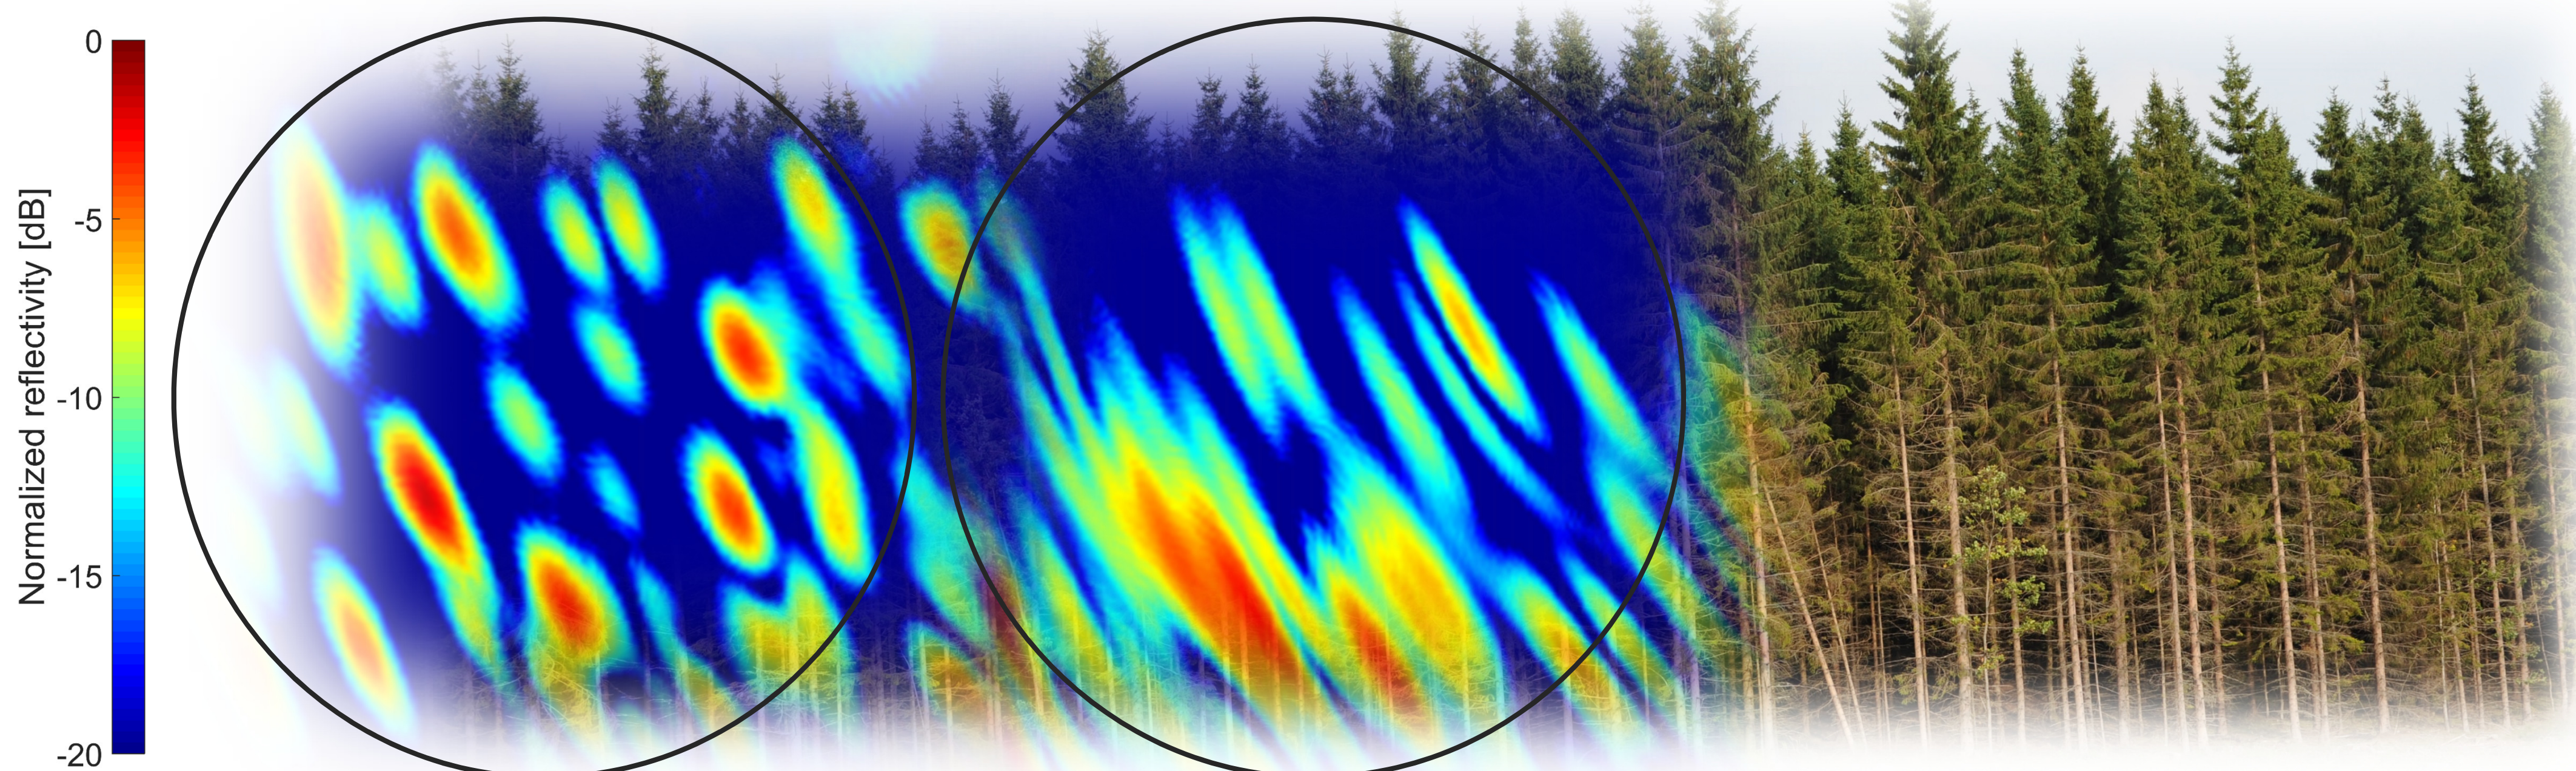

ACKNOWLEDGEMENTS

This work is financially supported by the Hildur and Sven Wingquist Foundation for Forest Research, the Swedish National Space Board (SNSB) and the European Space Agency (ESA).

CONTACT

Department of Earth and Space Sciences
Chalmers University of Technology
SE-412 96, Gothenburg, Sweden
Email: larula@chalmers.se

